




High Reliability USB 3.0 Cordsets

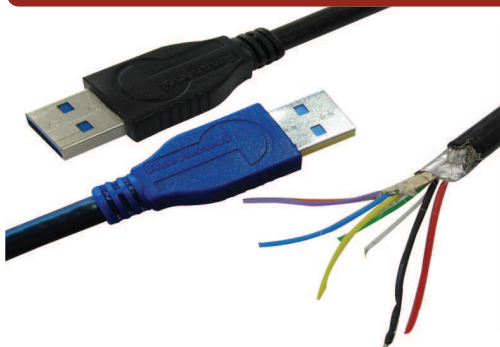

General construction: this is a USB-3.0 cable containing two 28 AWG 90Ω USB3.0 parallel shielded pair, one 28 AWG USB2.0 pair, and two 24 AWG power conductors, overall SFTP shields (SFTP = double shielding, braid and foil), jacketed in black UV resistant Polyurethane HFFR*. Designed for fixed or portable applications in industrial and harsh environments.

*HFFR: Halogen Free Flame Retardant.

Jacket compound specification:

Halogen Free Flame Retardant Polyether-based Polyurethane. Glossy finish. Excellent hydrolysis resistance. High microbial resistance. UV resistant. High flexibility.

Applications

- Robotics
- Railways
- Battelfield communication
- Motion control
- CNC machines
- Industrial process

PHYSICAL CHARACTERISTICS

DATA CONDUCTORS Tinned stranded copper, 7/0.13 mm nom (28 AWG)

DATA INSULATION 1 mm nom

COLOR DATA PAIR Green & white (USB2.0)
Yellow & blue, orange & violet (USB3.0)

POWER CONDUCTORS Tinned copper, 7/0.2 mm (24 AWG)

POWER INSULATION 1.1 mm nom

COLOR POWER WIRE Red & Black

SHIELDS USB 3.0 pair: foil + stranded tinned copper drain wire.
Overall: foil + shield braiding of tinner copper wires (coverage 85%).

JACKET PU compound

COLOR JACKET Black

WEIGHT 31 lbs/1000ft (46 kg/km)

OUTSIDE DIAM. 0.20 inch (5.7 mm nom. +/- 0.2)

MIN BEND RADIUS 57 mm (10 x O. D.)
(During operation)

MIN BEND RADIUS 28.5mm (5 x O.D.)
(During installation)

TEMPERATURE installation & operational Plus 85°C, minus 40°C

ELECTRICAL CHARACTERISTICS

USB3.0 Parallel pair

Conductor resistance ≤ 210 Ohm/km

Insulation resistance ≥ 200 MOhm/km

Capacitance (1 kHz) nom. 43 nF/km

Time delay nom. 5.0 ns/m

Time delay skew ≤ 150 ps/10m

Operating voltage (peak) ≤ 100 V

Impedance 90 ±7 Ohm

Test voltage 500 V

USB2.0 Pair

Electrical requirements acc. to USB2.0

Impedance 90 ±15 Ohm

Test voltage 500 V

Attenuation

USB3.0 pair-db/10m | **USB2.0 pair-db/100m**

625 MHZ 10 | **1 MHZ** 4

1250 MHZ 15 | **4 MHZ** 7.8

2500 MHZ 25 | **8 MHZ** 11.4

5000 MHZ 36 | **12 MHZ** 13.4

7000 MHZ 47 | **24 MHZ** 19

48 MHZ 27

96 MHZ 38

200 MHZ 64

400 MHZ 116

Datas for cable alone only (without USB plug)

IMPORTANT NOTE

⇒for PC to PC application, use a **CROSSED** cable
⇒for PC to peripheral application use a **STRAIGHT** cable
see page 87

CORDSSETS WITH A USB A PLUG OVERMOLDED ON EACH END

	Length (m/ft)	<u>CROSSED</u> wiring part number	<u>STRAIGHT</u> wiring part number
		<i>Black overmolding</i>	<i>Blue overmolding</i>
UNDER USB3 SPECIFICATION ≤1.8 M	0.5 m / 1.64 ft	USB 3 A A CROSSED 050 PU HFFR	USB 3 A A STRAIGHT 050 PU HFFR
	1 m / 3.28 ft	USB 3 A A CROSSED 100 PU HFFR	USB 3 A A STRAIGHT 100 PU HFFR
	1.5 m / 4.92 ft	USB 3 A A CROSSED 150 PU HFFR	USB 3 A A STRAIGHT 150 PU HFFR
	1.8 m / 5.91 ft	USB 3 A A CROSSED 180 PU HFFR	USB 3 A A STRAIGHT 180 PU HFFR
OUT OF USB3 SPECIFICATION >1.8 M	2 m / 6.56 ft	USB 3 A A CROSSED 200 PU HFFR	USB 3 A A STRAIGHT 200 PU HFFR
	2.5 m / 8.20 ft	USB 3 A A CROSSED 250 PU HFFR	USB 3 A A STRAIGHT 250 PU HFFR
	3 m / 9.84 ft	USB 3 A A CROSSED 300 PU HFFR	USB 3 A A STRAIGHT 300 PU HFFR
	3.5 m / 11.48 ft	USB 3 A A CROSSED 350 PU HFFR	USB 3 A A STRAIGHT 350 PU HFFR
	4 m / 13.12 ft	USB 3 A A CROSSED 400 PU HFFR	USB 3 A A STRAIGHT 400 PU HFFR
	4.5 m / 14.76 ft	USB 3 A A CROSSED 450 PU HFFR	USB 3 A A STRAIGHT 450 PU HFFR
	5 m / 16.40 ft	USB 3 A A CROSSED 500 PU HFFR	USB 3 A A STRAIGHT 500 PU HFFR